

Specification

Model Name		POS i600
Main Board	CPU	Intel® Core i3-3217U with L2 Cache 3MB
	Chipset	Intel® PCH HM76
	System Memory	1 x DDR3 SO-DIMM up to 8GB
Display	TFT LCD	15" TFT LCD(LED backlight)
	Brightness	250nits
	Resolution	1024 x 768
	Touch Screen	True Flat Projected Capacitive Technology
Storage	HDD / SSD Type	1 x SATA 2.5" HDD or SSD
I/O Ports -External	DC Power Input	1 x Mini Din 4P (DC 19V only)
	Cash Drawer	1 x RJ-11 (12V or 24V)
	Network (LAN)	1 x Gigabit Ethernet by RJ-45
	USB Port	4 x USB 2.0 / 2 x USB 3.0
	Serial Port	3 x RS-232(RJ48 connector), COM1/COM2(5V), COM3(12V), Power enabled by BIOS setting (default disable)
	Power ON/OFF	1 x power on/off switch button
	I/O Ports -Internal	Card Reader & iButton
Audio		HD Audio, 2W Speaker x 2
Bus Expansion		1 x Mini-PCI-E Slot
Compliance	IP66 on front panel	
OS Support	Windows 7, POSready 7, Win 8 Inventor Pro Retail	
Power Supply	External power adapter 65 watts, DC19V @ 3.42A max.	
Material	Main Unit: Die-casting aluminum ; I/O Cover: Plastic(black)	
Color	Main Unit: Black	
Certifications	CE, FCC, Class-A, RoHS	
Dimension (W x H x D)	376 x 316 x 197 mm	
Weight	6.5 Kg	
Operating Temperature	0°C ~ 40°C, 10% ~ 90% RH, non-condensing	
Storage Temperature	-20°C ~ 60°C, 10% ~ 90% RH, non-condensing	

*The right has been reserved to change the specification without prior notice.

Ordering Information

- POS i600: Fanless 15" POS System, Intel® Core i3-3217U, PCT touch



Optional Accessories

- MSR : Front, 3 Tracks (RS-232 or PS/2)
- MSR & iButton: MSR & iButton (RS-232 or PS/2)
- RFID 13.56MHz(USB)
- Fingerprint reader(USB)
- Smart card reader(USB)
- EMV Credit Card Semi-Integration

2nd Display:

- 2 lines x 20 chart VFD
- 10.4" TFT LCD display, Resolution: 800 x 600

Dimensions

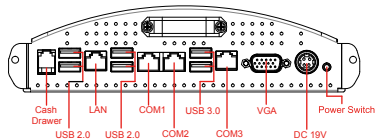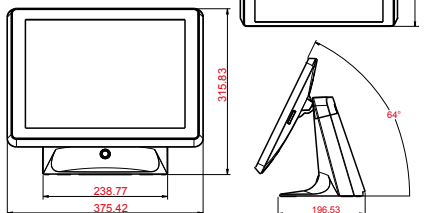

Digicom International Inc